

A

()

C



18V DC ~ 60V DC (24V DC)

允许引线电阻: $\leq 20 \Omega$

$4\text{ mA} \sim 20\text{ mA}$ $20 \sim 4\text{ mA}$
 $0(4)\text{ mA} \sim 20\text{ mA}$ $0\text{ mA} \sim 10\text{ mA}$ $20 \sim 4\text{ mA}$
 $0(1)\text{ V} \sim 5\text{ V}$ $0\text{ V} \sim 10\text{ V}$

输出纹波: $\leq 5 \text{ mV}_{\text{rms}}$ (250Ω)

$R_L \leq [(U-3)/0.02] \Omega$ U
 20 mA 20 mA 1 s U δ $...$ QA ~ 2 5 ;
 高电压准 $0 \text{ V} \sim 10 \text{ V}$; $\geq 2 \text{ M}\Omega$

隔离传输准确度 (25 °C ± 2 °C 不含冷端补偿):

编程器

→ 外形结构

× × : 17.8mm×110mm×117mm


→ 应用

/

/

/

/

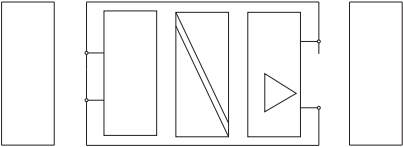

A.

BUS

DIN 35

D.

○

→ BUS规格

→ 安装

○ DIN IEC 60715 35mm

○ C.

→ 面板显示

○ PWR: ()

○ CH1 CH2: ()

1 2 LED
LED RTD ()
LED TC LED

→ 编程及校准

○

○

○

○

→ 注意事项

○ IP20 ()

○ IEC/EN 60664-1 2

○ IEC 61000-4

○

○

→ 补充说明

○